
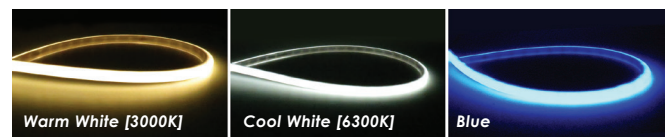


# Luna™

## Diffused Flexible LED Light

### Features

- Neon lighting-like illumination
- Soft and appealing light output
- Great for applications where spot-free illumination is required, like undercabinet applications to eliminate spots on the counter.
- Multiple color options available
- Standard IP66 rated and UV stable for installation in damp, wet or exterior locations. IP67 available upon request
- Dimmable with 0-10V or magnetic driver (MLV dimmer)
- Decorative end caps available for a more finished look

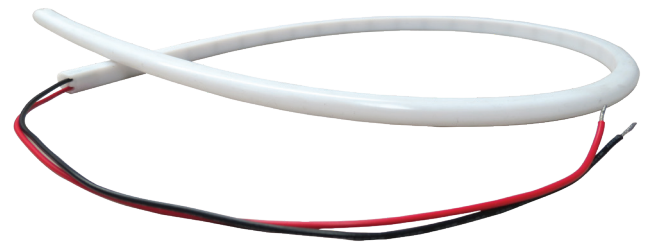

### Specification Guide:

**Sample Part #: RNLL2430.20012-10-6**


Base Part # .....:1  
 Voltage .....:2  
 Color Temp. ....:3  
 Light Length .....:4  
 Wire Length .....:5  
 Light Width .....:6  
 LED Chip Type .....:7

Base Part #	Voltage	Color Temp.	Light Length	Wire Length	Light Width	LED Chip Type
RNLL - Full Roll RNLLC - Custom Cut	24 - 24V 12 - 12V	27 - 2700K 30 - 3000K 35 - 3500K 41 - 4100K 63 - 6300K BL - Blue RD - Red AM - Amber	200 - 200 in. Max Length  - 24V cuts every 1.5 in - 12V cuts every 1 in	12 - 12 in. Standard Length	10 - 10mm (0.4 in.)	6 - High Performance (24V only) X - Standard Chips (12V & 2700K 24V Only)
IP67 Wire End Cap : 440-00335 / IP67 Finished End Cap : 440-00336						
Decorative Stainless Steel End Cap : RNLL-SS-CAP						
Decorative White Plastic End Cap : 810-00247 (For use in wood & fiberglass)						

### Product Details

Dimensions	.43" H x .41" W x Various L	
Housing	Silicone	
Wattage	2.3 Watts	4 Watts/Ft
Voltage	10-14V DC	24V DC
Current	0.19 Amp/Ft	0.17 Amp/Ft
Lumens	161 Lm/Ft	360 Lm/Ft
Kelvin	3000K, *3500K, *4100K, 6300K, Blue, *Red & Amber ± 300K	2700 ± 120K, 3130K ± 30K, 3480K ± 60K, 4200 ± 30K, *Blue, *Red & *Amber
Beam Angle	120°	
CRI	80+	
Efficacy	70 Lm/W	90 Lm/W
Cut Increment	1"	1.5"
LED Count	46 per foot	48 per foot
IP Rating	IP66 or IP67 (see spec guide)	
Operating Temp.	14°F (-10°C) - 122°F (50°C)	

### Product Dimensions

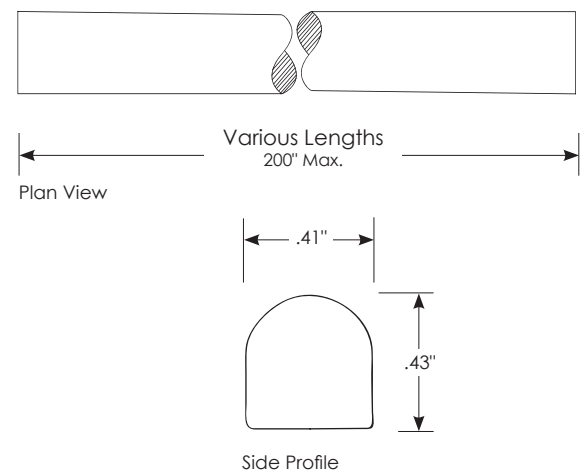

\* Available by special order / \*\*Suitable for installation in the storage area of a clothes closet / \*\*\*Kelvin colors shown account for the color shift experienced by the diffused silicone sleeve

Luna Patent Numbers: 9,695,991 | 2,861,157 | 9,909,719 ULE339122 V.2 S.2\*\*



## Accessory Specification

Description	Part #
Aluminum Straight Mount Track Without Tape	RNLL-1-72
Aluminum Straight Mount Track With Tape	RNLL-1T-72
Aluminum 45° Mount Track Without Tape	RNLL-2-72-CL
Aluminum 45° Mount Track With Tape	RNLL-2T-72
Black Aluminum 45° Mount Track With Tape	RNLL-2T-BK-72
*69" Aluminum Straight Mount Track With Mounting Clips	310-00137-69
*69" Aluminum Straight Mount Track With 30° Mounting Clips	310-00137-69-C3
Aluminum Round Track, Diffused Lens (Mounting clips included)	810-00163-DF
Black Plastic Straight Mount Track Without Tape	RBLL-2
Black Plastic Straight Mount Track With Tape	RBLL-1
White Plastic Straight Mount Track Without Tape	RBLL-5
White Plastic Straight Mount Track With Tape	RBLL-4
Clear Plastic Notched Track For Curved Installations	310-00168
Straight Mounting Clip for 310-00168	810-00009
30° Mounting Clip for 310-00168	810-00036
White Plastic Straight Mount Track With Flange, Without Tape	RNLL10-5
White Plastic Straight Mount Track With Flange, With Tape	RNLL10-5T
Black Plastic Straight Mount Track With Flange, Without Tape	RNLL10-6
Black Plastic Straight Mount Track With Flange, With Tape	RNLL10-6T
Aluminum Straight Mount Track Without Tape	*RNLL-1-96
Aluminum Straight Mount Track With Tape	*RNLL-1T-96
Aluminum 45° Mount Track Without Tape	*RNLL-2-96-CL
Aluminum 45° Mount Track With Tape	*RNLL-2T-96
Black Aluminum 45° Mount Track With Tape	*RNLL-2T-BK-96

\*96" track available, but is subject to a UPS surcharge

