

High Efficiency, DLC Listed

Product Details

- High 90+ CRI gives merchandise and packaging more visual appeal
- Saw tooth LED positioning increases the light spread in all directions eliminating shadows between fixtures
- Flat silicone lens eliminates banding issues that are typically associated with curved lens
- Aluminum housing provides superior construction and a sleek modern profile
- Low maintenance cost provides reduced operating costs while ensuring quality of light is preserved
- Multiple plug options including barrel connector or hard-wire harness

Specification Guide


Sample Part #: **690451.36.30.24.004**
 Base Part #
 Shelf Length(LL)
 Color Temperature (CC)
 Voltage (VV)
 Plug Type (XXX)

Base Part #	Shelf Length (LL)	Color Temp. (CC)	Voltage (VV)	Plug Type (XXX)	Overall Length (Barrell)
690451	30	30 - 3000K 35 - 3500K 40 - 4000K	24 - 24V	004 - Barrel Plug 005 - Wiring Harness	30.16"
	36				33.23"
	38				35.20"
	42				42.48"
	48				46.16"
	54				51.20"
	60				57.20"
	66				63.20"
72	69.21"				





Product Dimensions

Barrel Connector

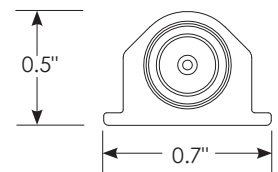

Wiring Harness

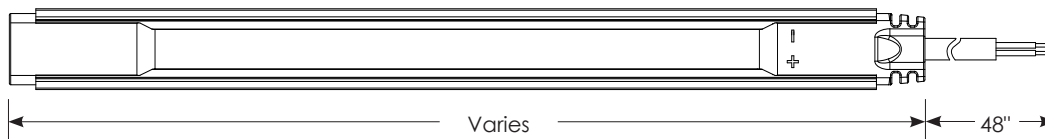

Technical Specifications

	Part Number	Recommended Shelf Size	Wattage (DC)	Wattage (AC)	Voltage	Current	Lumen Output	CRI	Overall Length (Barrell)
3000K	690451.30.30.24.xxx	30"	5.3 W	7.5 W	24	0.22 A	579 LM	90+	30.16
	690451.36.30.24.xxx	36"	6.1 W	8.5 W		0.25 A	668 LM		33.23
	690451.38.30.24.xxx	38"	7 W	9.6 W		0.29 A	763 LM		35.2
	690451.42.30.24.xxx	42"	7.7 W	10.4 W		0.32 A	854 LM		42.48
	690451.48.30.24.xxx	48"	8.6 W	11.4 W		0.36 A	897 LM		46.16
	690451.54.30.24.xxx	54"	9.6 W	12.5 W		0.40 A	896 LM		51.2
	690451.60.30.24.xxx	60"	10.3 W	13.3 W		0.43 A	1091 LM		57.2
	690451.66.30.24.xxx	66"	11.2 W	14.5 W		0.47 A	1190 LM		63.2
	690451.72.30.24.xxx	72"	13 W	16.3 W		0.54 A	1328 LM		69.21
3500K	690451.30.35.24.xxx	30"	5.3 W	7.5 W	24	0.22 A	594 LM	90+	30.16
	690451.36.35.24.xxx	36"	6.1 W	8.5 W		0.25 A	698 LM		33.23
	690451.38.35.24.xxx	38"	7 W	9.6 W		0.29 A	792 LM		35.2
	690451.42.35.24.xxx	42"	7.7 W	10.4 W		0.32 A	884 LM		42.48
	690451.48.35.24.xxx	48"	8.6 W	11.4 W		0.36 A	962 LM		46.16
	690451.54.35.24.xxx	54"	9.6 W	12.5 W		0.40 A	1093 LM		51.2
	690451.60.35.24.xxx	60"	10.3 W	13.3 W		0.43 A	1143 LM		57.2
	690451.66.35.24.xxx	66"	11.2 W	14.5 W		0.47 A	1246 LM		63.2
	690451.72.35.24.xxx	72"	13 W	16.3 W		0.54 A	1423 LM		69.21
4000K	690451.30.40.24.xxx	30"	5.3 W	7.5 W	24	0.22 A	627 LM	90+	30.16
	690451.36.40.24.xxx	36"	6.1 W	8.5 W		0.25 A	742 LM		33.23
	690451.38.40.24.xxx	38"	7 W	9.6 W		0.29 A	846 LM		35.2
	690451.42.40.24.xxx	42"	7.7 W	10.4 W		0.32 A	932 LM		42.48
	690451.48.40.24.xxx	48"	8.6 W	11.4 W		0.36 A	1034 LM		46.16
	690451.54.40.24.xxx	54"	9.6 W	12.5 W		0.40 A	1093 LM		51.2
	690451.60.40.24.xxx	60"	10.3 W	13.3 W		0.43 A	1213 LM		57.2
	690451.66.40.24.xxx	66"	11.2 W	14.5 W		0.47 A	1274 LM		63.2
	690451.72.40.24.xxx	72"	13 W	16.3 W		0.54 A	1493 LM		69.21

Note:

*Wattage and currents shown above are for the light only, and do not include the power supply

**Testing results shown are averages from the delivered fixture and include the lens

Power Supply Specification

Part #	LPF-25-24
Housing	Plastic
Wattage	25W
AC Input	90-277V AC
DC Output	24V DC, 1.05 Amp
Frequency	47-63Hz
Input Current	0.4 Amps max @ 115V AC
Power Factor	.97 @ 115V AC
Operating Temp	-35°C - 70°C
Protection	Over-voltage, Over-current & Short circuit protection, Auto-recovery.



CE IP67
E249377

Note: Power supplies can be purchased directly from Mean Well
<http://www.meanwellusa.com/>

Accessory Specification

Description	Part #
Straight Mount	810-00009
30° Angle Mount	810-00036
Straight Mount w/ Adhesive Tape	810-00223
30° Angle Mount w/ Adhesive Tape	810-00222
Straight Mount Light Shield Clip	810-00059
30° Angle Mount Light Shield Clip	810-00062
Aluminum Light Shield	690030.019



Straight Mount Clip in Light Shield



30° Mount Clip in Light Shield



Straight Mount Clip



30° Angle Mount Clip



Straight Mount Light Shield Clip



30° Angle Mount Light Shield Clip



Aluminum Light Shield