











Compel™ Flex Light Installation Instructions (Patent Pending)

(Part #'s: DMLLWW24XX-YYYYZZ)

PARTS NEEDED: (Parts needed will depend on your specific installation, below is an overview of all available parts)

			
Flex Light	Track	12" Tape to Wire	3" Tape to Tape
			
90° Tape to Tape	2-Way Tape to Tape	Shrink Tube	Finished End Caps & Silicone

TOOLS NEEDED (Customer Provided):

				
Scissors	Electric Drill w/ Phillips Bit	Screws	Construction Adhesive (Optional)	Heat Gun or Hair Dryer

Compel Flex Light Safety Instructions

IMPORTANT SAFETY INSTRUCTIONS. READ CAREFULLY FOR YOUR PROTECTION AND SAVE ALL INSTRUCTIONS.

- *Disconnect power before installing, adding or changing any component.
- *To avoid a hazard to children, account for all parts and destroy all packing materials.
- *Do not install any luminaire assembly closer than 6" from any combustible material.

Compel Flex Light Warranty Information

GENERAL PRODUCT LIMITED WARRANTY

ITC Incorporated under its corporate name or the elio trade name (collectively hereafter referred to as the "Company") warrants, to the original purchaser, that the product will be free of defects in materials and/or workmanship for the period of time set forth herein. This warranty period will begin from the original date of purchase of the product. Except as set forth below, this general product limited warranty will extend for three years. Power supplies also have a 3 year warranty.

MAXIMUM LIABILITY The Company's liability to repair or replace a damaged item shall be limited to the original purchaser of the item at the original invoice price of the damaged unit. Labor and freight will not be included

INSPECTION The Company reserves the right to review the damaged product and the site where the damage occurred. The Company may require the purchaser to ship the item to the Company for inspection. The damaged item must remain available for inspection until the claim is finalized. In the event the Company requests to inspect the product, it agrees to dispatch its findings pertaining to the alleged defective product within 45 days of receiving the product. Whenever claims are settled, the Company reserves the right to be subrogated under any existing insurance policies the purchaser may have.

EVENTS THAT VOID WARRANTY All above warranties are null and void if any one or more of the following events occurs: (a) the item is not provided to ITC for inspection upon the Company's request; (b) the Company determines that the item has been improperly installed, altered in any way or tampered with; (c) the Company determines that the item was not used under normal operating conditions or in accordance with labels or instructions for the item including; (d) the Company determines the product was not properly maintained, and/or; (e) the Company determines that an unauthorized repair, modification, disassembly, or other changes to the product created the alleged defect. In addition to the foregoing, this Warranty does not protect against damage to the product when the Company determines, in its sole discretion, that the damage resulted from acts of God such as lightning, flood, earthquake, war, vandalism, theft, normal-use wear and tear, terrorism, strikes, and labor stoppages. This warranty specifically excludes

damage, deterioration or discoloration caused by sunlight or similar ultraviolet rays and/or wavelengths and/or dents, holes or scratches to the unit caused by stones, rocks and/or debris.

EXCLUSIVE REMEDY This Warranty contains the sole warranty of the Company with respect to the product and is given in lieu of all other warranties. There are no other warranties, express or implied, including implied warranties of merchantability or fitness for a particular purpose and any implied warranties that cannot be waived and/or excluded are hereby limited in duration to the terms of this Warranty.

LIMITATION ON LIABILITY In no event shall the Company or any affiliate of the Company be liable for direct, indirect, special, incidental, consequential, or multiple damages arising out of the use of the item, regardless of the legal theory on which such claim is based, even if the Company has been advised of the possibility of such damage. Consequential damages shall include, but are not limited to loss of profits, loss of savings or revenue. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not be applicable.

Compel Flex Light Installation Instructions


1. Measure your installation location and measure out light to desired length. Cut the light on the designated cut lines (Photo 1 & 2). Failure to cut on the designated lines will damage the flex light and connector will not work.



Photo 1 - Standard Density



Photo 2 - High Density

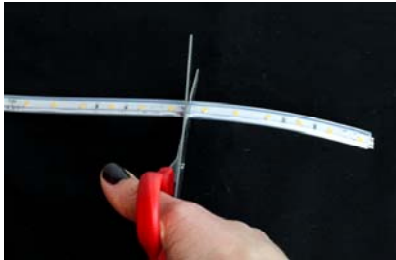

Note: The connectors have been designed to work as a system. It's very important that the red wire (+) & black wire (-) symbols on the light & Flex Connex align when the light is attached to the connector base. This process is simplified when the light is used from the start of the roll. If for some reason the location of the wires needs to be switched, the cover can be removed & the wire location can be changed. The high density version should be cut next to the solder pads rather than on the center line.

2. Once the light is cut, select the connector needed and place the cut end over the pins making sure to line up the positive and negative terminals. Press the clear cap over the light until it snaps into place.



3. If installing in a wet location you will need to completely seal the connections using the end caps and silicone sleeve. For the wired end, press the IP66 wire end cap onto the connector, then slide the wire through the silicone tube and attach using the silicone glue provided (photo 1). Next slide the silicone tube down onto the connector piece, making sure it's centered and use a hair dryer to seal the connection (photo 2). To completely seal and finish the end use the silicone glue provided to attach the finished end cap (photo 3). Note, the silicone requires a 24 hour dry time before completing the installation.



Photo 1



Photo 3



Photo 2

4. Once all connections have made proceed with installing the light. The track is scored every inch so to cut the track to length simply bend it back and forth until it snaps off or use scissors to cut through the plastic. To install the track, simply screw the track in place (**Note:** the track can be installed using construction adhesive as well). Once track is installed, press light into the track. Wire the light to your power source and turn on. If the light does not come on, check to make sure the positive/negative terminals on the light are lined up correctly with the positive/negative on the connector.

