

ELARA™ IP66 Sealed Flexible LED Light

Features

- Available in red, blue, warm white, and cool white.
- Custom lengths are available.
- 50,000 hours of estimated life
- Easy to install channel with staples, screws, or adhesive backing tape.
- Uses 3M 4926 VHB conformable acrylic foam tape*
- IP66 rated for damp and wet locations
- Maximum tape light length = 22' (670cm)

* For more information on tape and specific applications please contact ITC for 3M 4926 data sheet.

Product Details

LED Light:

Housing Material	Silicone 94V0
Profile Dimensions	.17" x .40"
Total Wattage	2 Watts/Ft (6.5 Watts/Meter)
Voltage	12V DC
Current	.12 Amp/Ft (.54 Amp/Meter)
Lumen Outpt	90 Lm/ft (295 Lm/Meter)
LED Color	Red, Blue, Warm White, Cool White
Cut Line Increment	1.97" (5 cm)
Available Lengths	22' (670) Rolls (Custom Lengths Available)
Wire Size	18 AWG
LED Count	18 per foot
Beam Angle	120°
IP Rating	IP66 Sealed
UV	UV Stable

Mounting Channel:

Housing Material	ABS FR15V
Profile Dimensions	.53" x .32"
Tape Backing	3M 4926

Specification Guide: Flexible Light


Part #: RBLL12KK-LLLWL-A
 Silicone Type.....
 Voltage.....
 Color Temp.....
 Light Length.....
 Wire Length.....

Base Part #	Voltage	Color Temp. (KK)	Light Width (LLL)	Wire Length (WL)
RBLL12	12 - 12V DC	30 - 3000K 63 - 6300K BL - Blue RD - Red	670 - 670cm* 5 cm Increments	12 - 12"

Note: Contact sales for info on cut lengths. Cannot be field cut. 5 cm Increments

Specification Guide: Mounting Channel

- RBLL-1** Black Channel - With 3M Tape Backing
- RBLL-2** Black Channel - Without Tape Backing
- RBLL10-KT** White Channel - With 3M Tape Backing
- RBLL10-KS** White Channel - Without Tape Backing

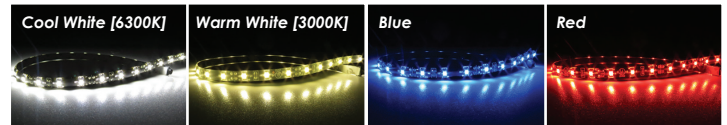


Mounting Channels:



Product Dimensions

LED Light:



Mounting Channel:

