


LOOK™ Inner Etched Two Bar Integrated LED Backlit Mirror

Part Number | 69455.XXXX.YYY.LR.RMT
Please see specifications for part configurations


Features

- Improved illumination and reduced shadowing through the use of side lighting
- Illumination from the back provides an ambient glow
- Mirror and mounting panel is IP44 rated
- Detailed dimensional drawings are available for all mirrors to help in planning the layout of blocking and power supply location.
- Safety PVC membrane on back prevents small pieces from falling off in the event of a mirror breakage
- Lead free silver backing exceeds ISO 9227:2012, 120 hour corrosion testing
- Can be mounted either portrait or landscape orientation
- Back box power supply provides flexible installation that meets stringent building codes
- Power supply junction box can be screwed into the pre-installed brackets on the mirror or into contractor supplied blocking

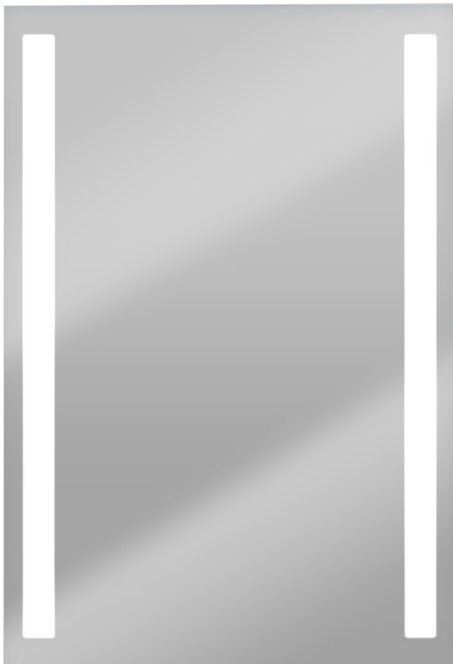


Inner Etched Two Bar Options

69455.2436.30K.LR.RMT



Dimensions	24"W x 35.6"H x 1.8"D
Housing	Anodized Aluminum
Lens	Glass
Wattage	12.4W @ 120V AC
Voltage	120 - 277V AC
Current	0.5A @ 120V AC
Lumens	1245 LM @ 120V AC
Kelvin	3000K or 4000K ²
CRI	> 90
Efficacy	100 LM/W @ 120V AC


69455.3040.30K.LR.RMT



Dimensions	30"W x 39.6"H x 1.8"D
Housing	Anodized Aluminum
Lens	Glass
Wattage	13.8W @ 120V AC
Voltage	120 - 277V AC
Current	0.6A @ 120V AC
Lumens	1385 LM @ 120V AC
Kelvin	3000K or 4000K ²
CRI	> 90
Efficacy	100 LM/W @ 120V AC

Power Box Specifications

*Ordered Separately

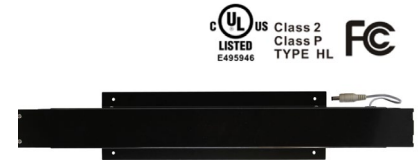

Part Number	610010.121
Dimensions	13"L x 1.25"W x 1.7"D
Housing	Aluminum
Wattage	28.8W
Voltage	120 - 277V AC
Current	MAX 1.3A
Power Factor	0.99 @120VAC 0.95 @277VAC
Frequency	47 - 63Hz
Efficacy	85% @120VAC 88% @277VAC

Notes:

1. Lumens per watt based on light source
2. Standard non-stock mirrors subject to 90 day lead time and a 50 piece minimum order quantity
3. Custom mirrors available upon request, subject to a 50 piece minimum, 50% deposit and 90 day lead time following approved drawings
4. Mirrors must be shipped LTL and cannot be shipped via FedEx or UPS