


LOOK™ No Etch

Integrated LED Backlit Mirror

Part Number | **694NEYYYY-KKXX00B**
Please see specifications for part configurations

Features

- Improved illumination and reduced shadowing through the use of side lighting
- Illumination from the back provides an ambient glow
- Mirror and mounting panel is IP44 rated
- Detailed dimensional drawings are available for all mirrors to help in planning the layout of blocking and power supply location.
- Safety PVC membrane on back prevents small pieces from falling off in the event of a mirror breakage
- Lead free silver backing exceeds ISO 9227:2012, 120 hour corrosion testing
- Can be mounted either portrait or landscape orientation
- Back box power supply provides flexible installation that meets stringent building codes
- Power supply junction box can be screwed into the pre-installed brackets on the mirror or into contractor supplied blocking

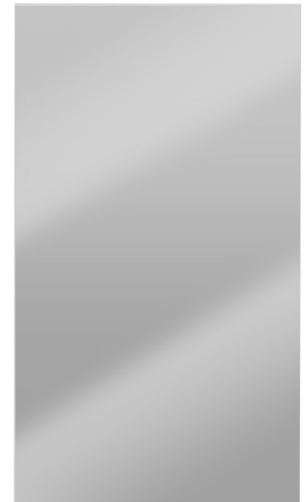

Part Number Specification

Base Part #	Mirror Style	Size (YYYY)	Color Temperature (KK)	Output (XX)	Frame
694	NE - No Etching	1830 - 18"W x 30"L 2436 - 24"W x 36"L 3927 - 39"W x 27"L 2442 - 24"W x 42"L	30 - 3000K 35 - 3500K* 40 - 4000K*	SO - Standard HO - High*	B - Black Frame

* Non-stock option, subject to a 50 piece minimum order quantity, contact sales for availability.

No Etch Options

694NE1830-KKXX00B



Output	Standard	High
Dimensions	18"W x 30"H x 1.7"D	
Housing	Anodized Aluminum	
Lens	Glass	
Wattage	21.6W	37.8W
Voltage	120 - 277V AC	
Current	0.2A	0.3A
Lumens	1565 LM	3455 LM
Kelvin	3000K	
CRI	> 90	
Efficacy	72 LM/W	91 LM/W

694NE2436-KKXX00B



Output	Standard	High
Dimensions	24"W x 36"H x 1.7"D	
Housing	Anodized Aluminum	
Lens	Glass	
Wattage	36W	64.5W
Voltage	120 - 277V AC	
Current	0.30A	0.54A
Lumens	2500 LM	5500 LM
Kelvin	3000K, 3500K ² or 4000K ²	
CRI	> 90	
Efficacy	69.5 LM/W	85.3 LM/W

694NE3927-KKXX00B



Output	Standard	High
Dimensions	39"W x 27"H x 1.7"D	
Housing	Anodized Aluminum	
Lens	Glass	
Wattage	40W	71W
Voltage	120 - 277V AC	
Current	0.33A	0.59A
Lumens	2900 LM	6100 LM
Kelvin	3000K, 3500K ² or 4000K ²	
CRI	> 90	
Efficacy	72 LM/W	85.9 LM/W


694NE2442-KKXX00B




Output	Standard	High
Dimensions	42"W x 24"H x 1.7"D	
Housing	Anodized Aluminum	
Lens	Glass	
Wattage	28.8W	50.8W
Voltage	120 - 277V AC	
Current	0.26A	0.46
Lumens	2050 LM	4000 LM
Kelvin	3000K, 3500K ² or 4000K ²	
CRI	> 90	
Efficacy	71.6 LM/W	85.2 LM/W

Power Box Specifications

**Ordered Separately



Part Number	610010.121
Dimensions	13"L x 1.25"W x 1.7"D
Housing	Aluminum
Wattage	28.8W
Voltage	120 - 277V AC
Current	MAX 1.3A
Power Factor	0.99 @ 120V AC 0.95 @ 277V AC
Frequency	47 - 63Hz
Efficacy	85% @120VAC 88% @277VAC



Notes:

1. Lumens per watt based on light source
2. Standard non-stock mirrors subject to 90 day lead time
3. Custom mirrors available upon request, subject to a 50 piece minimum, 50% deposit and 90 day lead time following approved drawings
4. Mirrors must be shipped LTL and cannot be shipped via FedEx or UPS