



90 Watt LED Flood Light

Features:

- Integral thermal transfer material pulls heat away from the LEDs allowing them to run cooler and provide a longer life span.
- Optical lens increases the amount of usable light output and increases the efficacy.
- Extensive testing including, seal integrity, temperature cycling and environmental testing ensure the light is able to withstand the harshest conditions.
- Synthetic spacers eliminate potential corrosion between dissimilar metals.
- 30,000 hour estimated life
- PPG Norsok paint and marine grade anodized aluminum exceed level 5 - 400 hour salt spray requirements
- Registered with Lloyds of London, certificate #17/80011(E1)

Product Details:


Housing/Bezel	Powder-coated Anodized Aluminum
Glass	Tempered
Dimensions	13.7" x 10.1" x 5.1"
Wattage	90W
Voltage	120-277V AC
Current	0.8A @ 120V AC / 0.4A @ 240V AC
LED Color	5,000K
Luminous Density	10,500 Lm
CRI	70
Power Factor	>0.9 @ 120V & 240V AC
Efficacy	116 Lm/W
Weight	14 lbs.

Part Numbers:

69702	90 Watt Flood Light
440-00145	Optional Mounting Bracket



Product Dimensions:

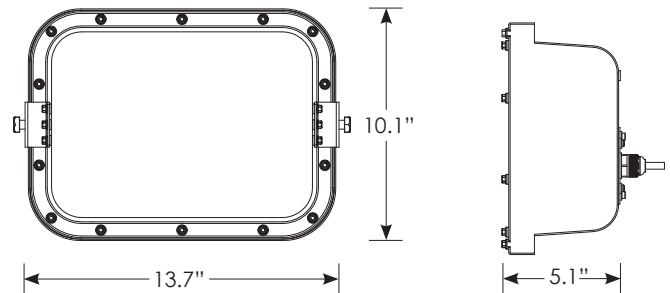

Application:



STADIUM LIGHTING



230 E. Lakewood Blvd. • P.O. Box 8338 • Holland • MI • 49422-8338
 Phone: 616-396-1355 • Fax: 616-396-1152 • www.itc-cruise.com • sales@itc-us.com