



**Part Number**

690UVW.XX.YY.ZZ  
Please see specification guide for part configurations




**Product Details**


- Adjustable reflectors on the canopy style allow for more precise light direction
- Saw tooth LED positioning increases the light spread in all directions eliminating shadows between fixtures
- Flat silicone lens eliminates banding issues that are typically associated with curved lens
- Aluminum housing provides superior construction and a sleek modern profile

**Product Dimensions**

Double Canopy with Wings

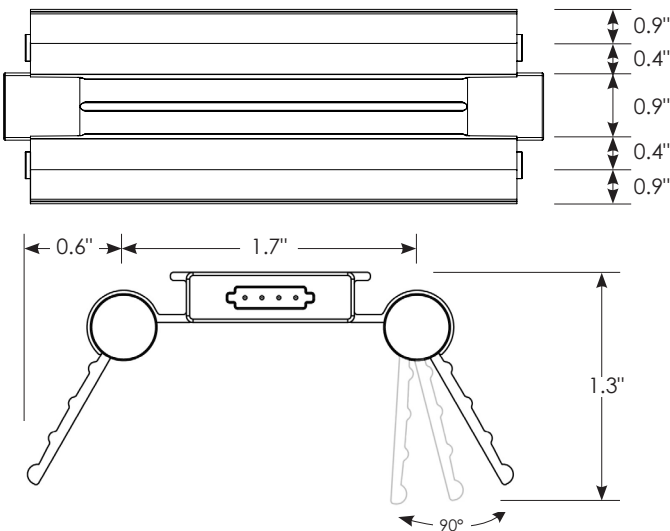


Shelf Light with Connector\*\*

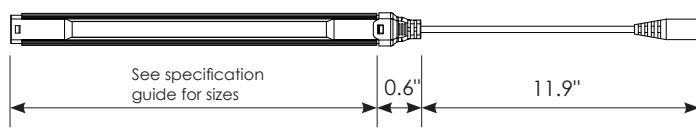


\*\*Note: connector dimension is the same for both the Canopy & Shelf lights. Connectors sold separately.

**Product Dimensions**

Single Canopy with Wings

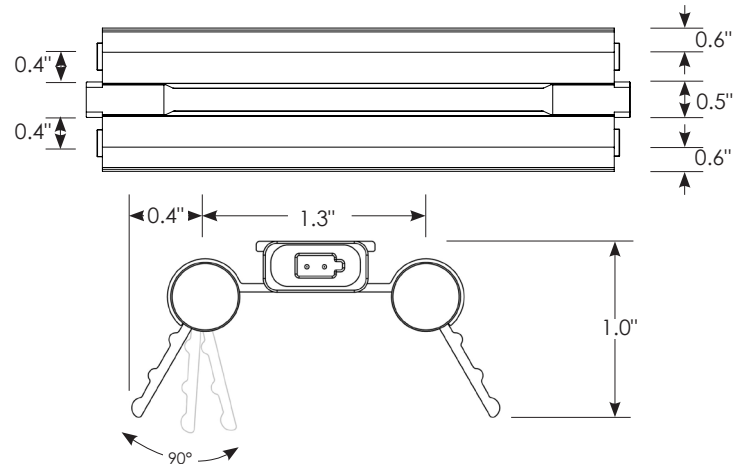

Shelf Light without Wings

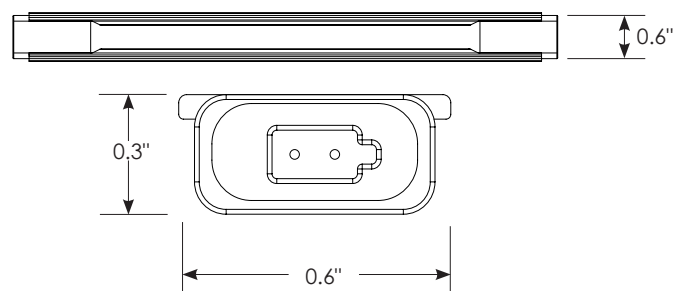

Patent # 9,927,092



## Specification Guide:

Sample Part #: **690671.36.30.24.001**

Light Style (W)	.....	.....	.....	.....	.....
Lumen Output (X)	.....	.....	.....	.....	.....
# of LED Strips (Y)	.....	.....	.....	.....	.....
Shelf Length (LL)	.....	.....	.....	.....	.....
Color Temperature (KK)	.....	.....	.....	.....	.....
Voltage (VV)	.....	.....	.....	.....	.....
Optional Hardwire Harness (ZZ)	.....	.....	.....	.....	.....

Base Part #	Style (W)	Light Output (X)	# of LED Strips (Y)	Shelf Length (LL)	Color Temp. (KK)	Voltage (VV)	Light Length / Length with Connector	Hardwire Harness (optional - ZZ)
690	6 - Canopy 4 - Shelf	7 - Max Lumen 5 - Standard Lumen	1 - Single LED Strip 0 - Double LED Strip (Canopy only)	18	30 - 3000K	24 - 24V	15.3" / 16.3" 21" / 22" 33" / 34" 46" / 47" 57" / 58" 69" / 70"	001 - 48" Wire (Leave blank for plug version)
				24	35 - 3500K			
				36	40 - 4000K			
				48	50 - 5000K			
				60	57 - 5700K			
				72	65 - 6500K			

## Technical Specifications

Part Number	Description	Recommended Shelf Size	Wattage	Voltage	Current	CRI	Lumens					
							3000K	3500K	4000K	5000K	5700K	6500K
<b>Standard Lumen Style</b>												
690451.11.KK.24	9.3" Single shelf	11"	1.3 W	24 V	0.05 A	90+	98 LM	100 LM	100 LM	105 LM	98 LM	90 LM
690451.18.KK.24	15.3" Single shelf	18"	4.9 W		0.21 A		297 LM	370 LM	370 LM	380 LM	353 LM	345 LM
690451.24.KK.24	21" Single shelf	24"	6.6 W		0.28 A		396 LM	515 LM	515 LM	515 LM	493 LM	465 LM
690451.30.KK.24	30" Single shelf	30"	9.9 W		0.41 A		595 LM	635 LM	635 LM	665 LM	610 LM	570 LM
690451.36.KK.24	33" Single shelf	36"	11.5 W		0.48 A		693 LM	970 LM	970 LM	875 LM	800 LM	783 LM
690451.42.KK.24	42.5" Single shelf	42"	14.8 W		0.62 A		890 LM	1200 LM	1200 LM	1260 LM	1150 LM	1105 LM
690451.48.KK.24	46" Single shelf	48"	16.5 W		0.69 A		990 LM	1335 LM	1335 LM	1395 LM	1270 LM	1237 LM
690451.60.KK.24	57" Single shelf	60"	19.8 W		0.82 A		1188 LM	1540 LM	1540 LM	1630 LM	1485 LM	1438 LM
690451.72.KK.24	69" Single shelf	72"	24.7 W		1.03 A		1485 LM	1740 LM	1740 LM	1850 LM	1685 LM	1630 LM
<b>Max Lumen Style</b>												
690471.11.KK.24	9.3" Single shelf	11"	2.5 W	24 V	0.10 A	90+	200 LM	203 LM	205 LM	207 LM	192 LM	186 LM
690471.18.KK.24	15.3" Single shelf	18"	6.6 W		0.28 A		491 LM	495 LM	505 LM	512 LM	468 LM	454 LM
690471.24.KK.24	21" Single shelf	24"	9.9 W		0.41 A		764 LM	770 LM	780 LM	787 LM	733 LM	706 LM
690471.30.KK.24	30" Single shelf	30"	14.9 W		0.62 A		933 LM	933 LM	930 LM	942 LM	902 LM	865 LM
690471.36.KK.24	33" Single shelf	36"	16.5 W		0.69 A		1210 LM	1210 LM	1250 LM	1310 LM	1210 LM	1110 LM
690471.48.KK.24	46" Single shelf	48"	21.4 W		0.89 A		1570 LM	1570 LM	1550 LM	1670 LM	1570 LM	1420 LM
690471.42.KK.24	42.5" Single shelf	42"	23.1 W		0.96 A		1710 LM	1710 LM	1750 LM	1810 LM	1710 LM	1610 LM
690471.60.KK.24	57" Single shelf	60"	29.7 W		1.24 A		2215 LM	2215 LM	2300 LM	2340 LM	2170 LM	2112 LM
690471.72.KK.24	69" Single shelf	72"	36.3 W		1.51 A		2580 LM	2580 LM	2620 LM	2620 LM	2398 LM	2325 LM

\*Testing results shown are averages from the delivered fixture and include the lens

\*\*Additional color temperatures available by special order

\*\*\*Data shown is for a single LED strip. Values will need to be doubled for the max lumen canopy lights.

## Accessory Specification


### 1 Determine the power supply needed

Power Supply	Part #
60W	690010.035
100W	690010.031



### 2 Determine the mounting bracket needed

Description	Part #
Straight Mount - Double Canopy	810-00008
Straight Mount - Single Canopy or Shelf	810-00009
30° Angle Mount - Shelf Light Only	810-00036
Straight Mount - Light Shield Clip (shelf light only)	810-00059
30° Angle Mount - Light Shield Clip (shelf light only)	810-00062
Aluminum Light Shield	690030.019

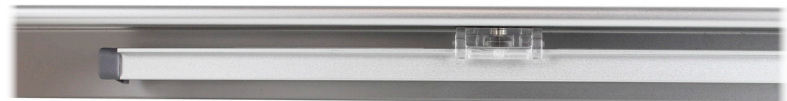

Straight Mount Clip in Light Shield



30° Mount Clip in Light Shield



Double Canopy  
Straight Mount Clip



30° Angle Mount  
Shelf Clip



Single Canopy or Shelf  
Straight Mount Clip



Straight Mount  
Shield Clip



30° Angle Mount  
Shield Clip



Aluminum Light Shield